




▶▶ SPAD ACOUSTIC DIFFUSOR

Technical specifications



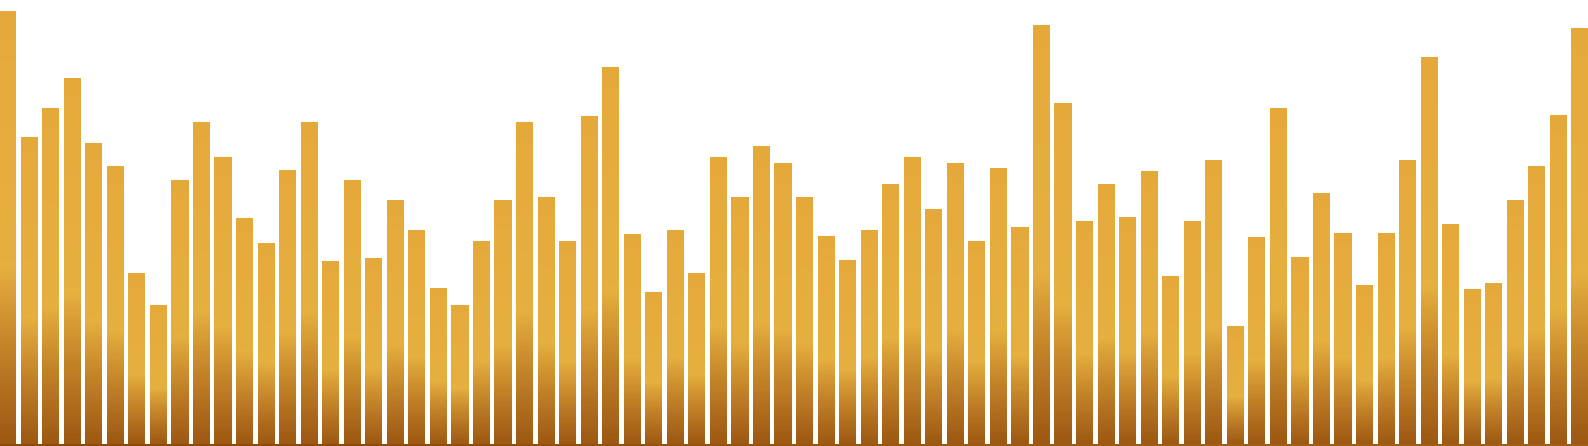

SPAD ACOUSTIC DIFFUSOR

SPECIFICATIONS	SPAD ACOUSTIC DIFFUSOR
COVERING	Premium Suede on the front
DIMENSIONS	L X I X h = 400 x 400 x 90 mm
TECHNOLOGIE	- Mechanical inertia increase system - Concave resonance suppressor - Integrated multi-layered and multi-density built
DENSITIES	75 kg/m ³ , 450 kg/m ³ , 170 kg/m ³ and 40 kg/m ³
HANGING	Velcro
WEIGHT	1,2 kg

SPAD

Side-dampening Poly-cylindrical Acoustic Diffusor

APPLICATION AREAS

SMAD is a panel who have been design for the requirements of any Hifi liste ning room, studios, and auditoriums ...

It is made to have good result easily and fastly.

SPAD for better sound image focusing and energy sensations.

ADVANTAGES

- Good looking and discreet
- Plug & play and modular
- Innovative and powerful
- Lightweight

PRESENTATION

SPAD panel is designed to improve room acoustics.

It can be fixed everywhere in your house thanks to its fast fixation system. Totally "plug & play".

SPAD panel is very discreet and aesthetic. He has a thin design (only 90 mm) . It is covered with high-quality suede fabric available in 45 colors. It will easily find its place in your modern or classic interior.

SPAD panel is very efficient too ! With its innovative technology that give it a powerful diffusing properties and an high end built in.

Its innovative design makes it a product that doesn't have usual default of this kind of conception. We succeed to resolve the brilliance sounding, the side effect, inertia and the minimum required placement distance.

The SPAD diffusing is the better way to have a perfect imaging sounding message in domestic listening room (under 120 m²).

TECHNOLOGY

Concave resonance elimination

90 degrees diffusing with progressive diffusion to absorption gradual shift to the side of the panels that allow to eliminate "concave resonance". All side effect interference are therefore eliminated.

Mechanical inertia increase system

Preload and commissioning elastic pressure of the diffusing part for maximum energy return despite the low weight of the product.

Bright Sound damper system

Wood essence have been selected to have the better diffusing balance on each frequency bande.

INSTALLATION

PYT panel can be hang on wall just in few seconds.

Felt back side version:

The back panel is loop-like (velcro) over its entire sur face. It is possible to hang it everywhere thanks to the adhesive pads (velcro hook) provided.

The panel also has a built metal eyelet in its back.

This allows to hang it with a small nail or screw on wall.

CLEANING

The imitation suede received a anti-smudge treatment.

You can use some lukewarm water if the need is, never use solvents.

Avoid any rubbing support to keep the best aspect of the product.

No Hoover. Favor sticky brush for clothes.

Note:

SPAD panels must not be suspended from the ceiling.

The information contained in this document are only for general information. As methods of use and appli cation are beyond our control and given the diversity of listening conditions specific to each. A commitment to responsibility for the final result can not be granted.

alpha
Sabine

